


100AMP, 5 CIRCUIT LOAD CENTER  
 50AMP, BREAKER 2-POLE  
 30AMP, BREAKER 1-POLE  
 20AMP, BREAKER 1-POLE



14-50R  
 50AMP,  
 RECEPTACLE

LOOP FEED LUG TERMINAL BAR




WIRE RANGE TABLE



CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-1/0	12-8	12-1/0
LOAD	14-10	14-10	---	---
NEUTRAL	14-4	14-4	14-4	14-4
EQUIP. GRND.	12-6	12-2	12-6	12-2
POST LINE CONNECTORS SUITABLE FOR LOOP FEED	#1-300	KCMIL	#1-300	KCMIL
EQUIP. GRND.	12-2	12-2	12-2	12-2

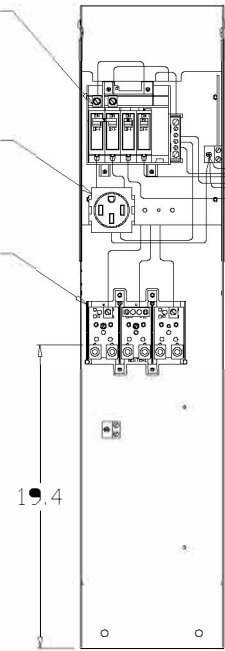


BREAKER  
 KO  
 5-20R2GFI  
 20AMP,  
 GFI DUPLEX  
 BR32U  
 30AMP  
 RECEPTACLE



9/16" x 15/16"  
 ØROUND MOUNTING  
 HOLE (4X)

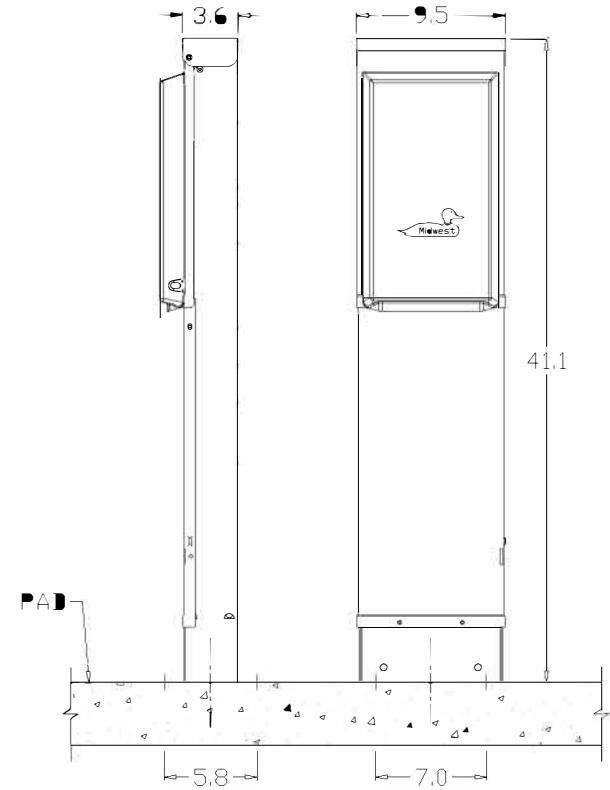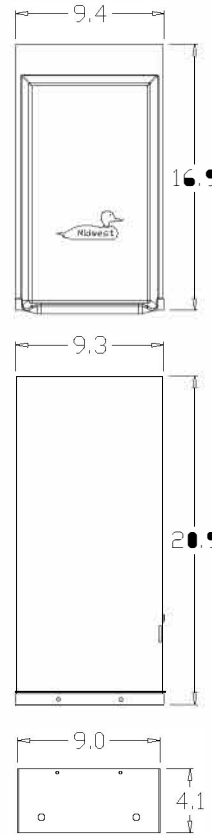

NOTES: PAD MOUNTED POST

MIDWEST ELECTRIC  
 PRODUCTS, INC.  
 Mankato, MN  


\* = Critical To Quality  
 Unless Otherwise Specified  
 AutoCad Generated  
 Tolerances On:  
 3 Pl. Decimals ± .010  
 2 Pl. Decimals ± .030  
 Fractions ± 1/32"  
 Angles ± 1/2°  
 Holes ± .003  
 Dimensions Are In Inches

TITLE: **U075CP4010**  
**OUTLINE DRAWING**  
 DWG NO: **19838604**

SH100

Rev 1.01 R0815611 JE 3-12-06