



Power Outlet Panel Model U041C010

- 30 ampere type TT-30 receptacle.
- 20 ampere GFCI convenience receptacle.
- 30 ampere and 20 ampere circuit breakers provided.
- Standard Lug – Not Loop Feed.

Fig. J
Interior Layout

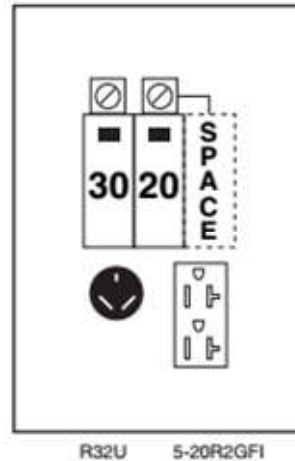

Knockout Configuration



G= 1/2", 3/4", 1"
N= 1/2", 3/4", 1", 1-1/4", 1-1/2"

Cabinet Dimensions
(FIG. A)

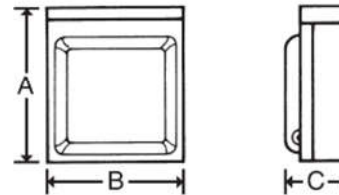


TABLE P **Wire Range**

Connector	Copper		Aluminum	
	Solid	Strand	Solid	Strand
Line	14-8	14-1/0	12-8	12-1/0
Load	14-10	14-10	----	----
Neutral End Hole	14-8	14-2	12-8	12-2
Neutral Side Hole	14-8	14-4	12-8	12-4
Equip. Grnd.	12-8	12-2	12-8	12-2

MODEL NUMBER	REPLACEMENT PARTS		CABINET SIZE	ENCLOSURE STYLE page 91	CABINET DIMENSIONS			KNOCKOUT FIGURE page 91
	METER SOCKET	POST LUGS			HEIGHT	WIDTH	DEPTH	
					A	B	C	
U041C010	—	—	6 X 14	A	14-3/8"	7-1/4"	5-3/16"	1

FIG.	UL	LUG TYPE	MODEL NUMBER	RECEPTACLES	CIRCUIT PROTECTION	AMP	VOLTS	WIRE RANGE*	CABINET SIZE	HUB OPENING	LOAD & NEUTRAL BAR	UNIT WT.	STD. PKG.
J	Y	STANDARD	U041C010	R32U 5-20R2GFI	CB130 CB120 SPACE CB120	70	120/240	P	6 x 14	Y	LC33N7	10	4